

TL39

TOWABLE BOOM LIFT



- Tough yet compact trailer mounted boom lift
- Easy to set-up hydraulic outriggers
- Manoeuvrable articulating/telescopic boom
- Smooth, easy to operate controls
- Simple to maintain

 **snorkel**
www.snorkellifts.com

TOWABLE BOOM LIFT



TL39

| DIMENSIONS | TL39 |
|-----------------------------|-------------|
| Max. working height | 13.5m |
| Max. platform height | 11.5m |
| Max. working outreach | 6.4m |
| Platform width (C) | 1.24m |
| Platform depth (D) | 0.75m |
| Outrigger footprint (A x B) | 4.0m x 3.6m |
| Towing width (E) | 1.61m |
| Towing length (F) | 5.0m |
| Stowed height (G) | 2.01m |

| PERFORMANCE | |
|----------------------------------|---|
| Platform capacity (SWL) | 215kg |
| Max. wind speed | 12.5m/s |
| Turret rotation (non-continuous) | 540° |
| Tyres | 185R14C |
| Controls | electric over hydraulic, variable speed |

| POWER | |
|---------------|--|
| Power source | gas engine |
| Power options | Power Options: bi-energy or diesel engine, 230V mains or 24V DC electric |

| WEIGHT | |
|-------------------------|---------|
| Weight (gasoline model) | 1,480kg |

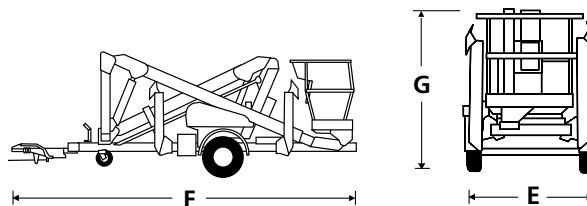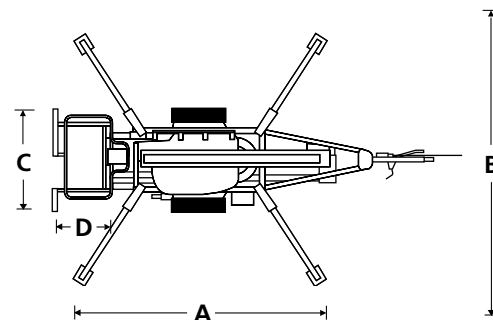


STANDARD FEATURES

- Articulating / telescopic boom configuration
- Hydraulic outriggers
- Electric controls at platform
- Power line to platform
- Hydraulic basket rotate
- Integral road lighting board
- Integrated automatic battery charger 110V-230V
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Auto-level outriggers with LED indicators
- Work lights in platform
- Airline to platform
- Flashing amber light
- Nylon spreader pads (set of 4)
- Environmental hydraulic oil
- 110V/220V AC power

WORKING ENVELOPE

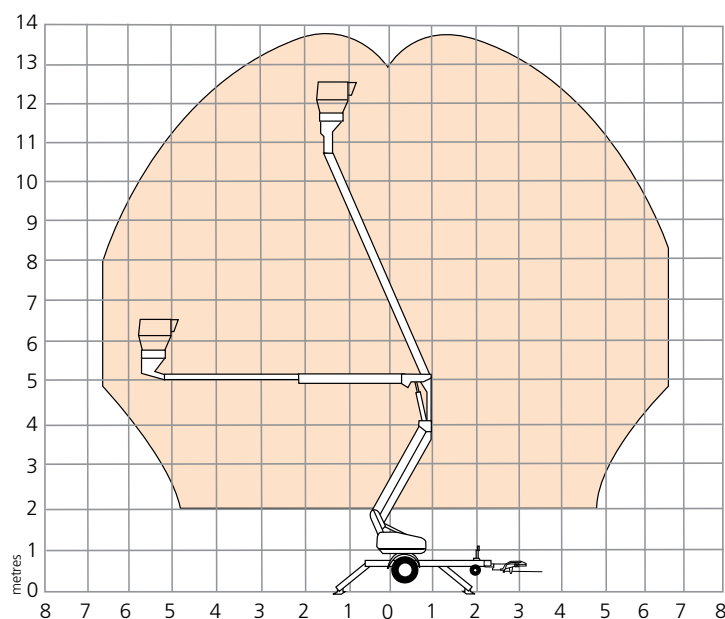

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales.emea@snorkellifts.com